

# VKP-7958A Klystron



CPI/Microwave Power Products (MPP) offers super-power klystrons for particle accelerator applications. Typical performance for these devices are operating frequencies of 350 to 700 MHz and output power up to 1.3 MW CW. The VKP-7958A is a 500 MHz, 800 kW CW klystron developed for DESY.

## Key Features


- Electron gun with modulating anode for beam current adjustment
- 6-cavity rf circuit, including one 2<sup>nd</sup> harmonic cavity for enhanced efficiency
- Single coaxial output window
- Air insulation for electron gun (HV Enclosure not shown in photo)

## Typical Operating Parameters

Power Output	800	kWatts (min)
Beam Voltage	74	kV (max)
Beam Current	18	A (max)
Mod Anode Voltage	55	kV
Frequency	499.67	MHz
1dB Bandwidth	± 1.0	MHz (min)
Saturated Gain	40	dB (min)
Efficiency	62	% (min)
Collector Coolant Flow	140 / 530	gpm / l/m
Body I Coolant Flow	4.4 / 1	gpm / m <sup>3</sup> /h
Body II Coolant Flow	6.6 / 1.5	gpm / m <sup>3</sup> /h
O/P Window Cooling (Air)	50 / 100	cfm / m <sup>3</sup> /h
Electron Gun Cooling (Air)	50 / 100	cfm / m <sup>3</sup> /h

Electromagnet:		
Gun Coil Current	5	Amps
Gun Coil Voltage	8	Volts
Main Coil Current	14	Amps
Main Coil Voltage	180	Volts

Size with Accessories:		
Length	60 / 1530	inches / mm
Width	54 / 1370	inches / mm
Height	157 / 4000	inches / mm
Weight	5,200 / 2,360	Pounds / kg

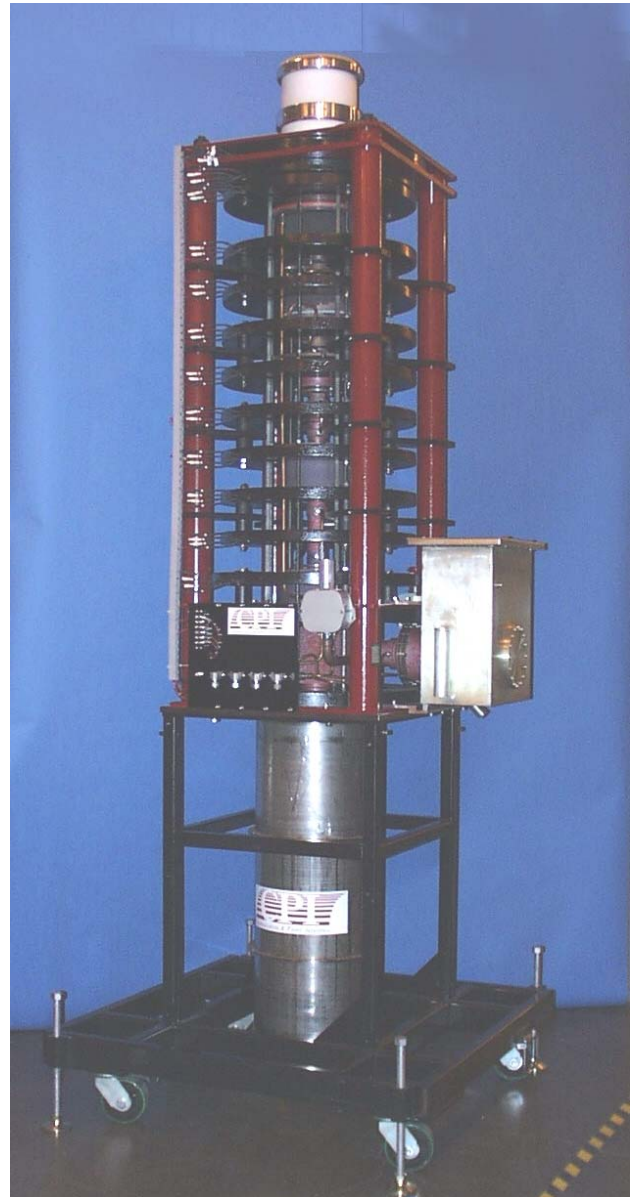

May 2002

For information on Super Power Klystrons and other CPI/MPP products, visit our website at [www.cpii.com/mpp](http://www.cpii.com/mpp), or contact:

CPI/Microwave Power Products Division, 811 Hansen Way, Palo Alto, CA 94303-0750  
Telephone: 650-846-3900, Fax: 650-856-0705, Email: [marketing@cpii.com](mailto:marketing@cpii.com)